

BEST AVAILABLE COPY

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 July 2003 (10.07.2003)

PCT

(10) International Publication Number
WO 03/056403 A1

(51) International Patent Classification⁷: G05B 23/02,
G06F 17/30

MONTALVO, Roel, Ila, K.; 5404 West Monte Cristo Avenue, Glendale, AZ 85306 (US). STRILICH, James, A.; 2140 West Thunderbird Road, Phoenix, AZ 85023 (US).

(21) International Application Number: PCT/US02/41711

(74) Agents: CRISS, Roger, H. et al.; Honeywell International Inc., 101 Columbia Road, P.O. Box 2245, Morristown, NJ 07960 (US).

(22) International Filing Date:
17 December 2002 (17.12.2002)

(25) Filing Language: English

(81) Designated State (national): CA.

(26) Publication Language: English

(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR).

(30) Priority Data:
10/026,297 21 December 2001 (21.12.2001) US

Published:



— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(71) Applicant: HONEYWELL INTERNATIONAL INC.
[US/US]; 101 Columbia Road, P.O. Box 2245, Morristown, NJ 07960 (US).

(72) Inventors: METS, Christiaan, M., H.; 2923 S. Holguin Way, Chandler, AZ 85248 (US). RYBARCZYK, David, E.; 19826 North Sixth Drive, Phoenix, AZ 85024 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR STORING AND RETRIEVING DATA RELATED TO A PROCESS ACTIVITY

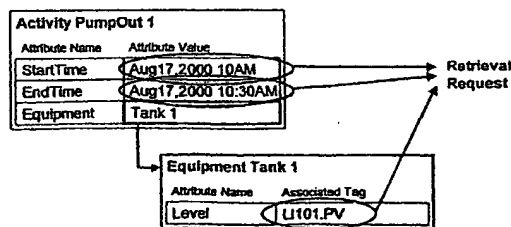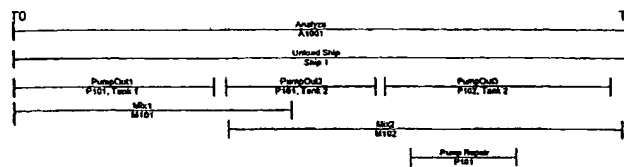

(57) Abstract: A method and apparatus (22) that processes time series, event and/or activity data of a process (28) according to a data structure. The data structure defines one or more activities that frame the time series, event and/or activity data. Each activity and each event has one or more attributes. Each attribute has a value. At least one of the attributes defines an interval of the activity by start and end times. Another attribute includes a time varying parameter that represents the time series data. Another attribute defines a time stamp of an event. The time varying parameter is linked to a device that produces the time series data when the process is run. The time series, event and/or activity data is collected (126, 128, 134) and processed (126, 132, 128, 134) according to the data structure for storage in and/or retrieval (136, 146, 166, 176) from a memory (26, 38). A relationship between data of one or more activities and the time series, event and/or activity data is processed according to the data structure to retrieve the time series, event and/or activity data from the memory.

WO 03/056403 A1

METHOD AND APPARATUS FOR STORING AND RETRIEVING DATA RELATED TO A PROCESS
ACTIVITY

5 **FIELD OF THE INVENTION**

This invention relates to a method and apparatus for processing activity data of a process. In particular, the method and apparatus of the present invention is concerned with gathering, storing and retrieving activity data of a process.

10

BACKGROUND OF THE INVENTION

A process takes place over a period of time. During the process various events occur and various parameters vary in value. There is a need
5 to monitor a process in order to analyze its performance or of any parameters thereof, whether the process is an industrial one for the handling, treatment or flow of material or other process, such as the tracking of the weather or of commodities or other financial instruments and the like.

10 Current monitoring and processing systems monitor and store events that occur during the process and time sampled values (time series data) of the time variable parameters of the process. It is necessary to retrieve the process data for analysis and reports, for example, trending analysis and reports. The current systems have difficulty in retrieving events and time
15 series data of a process. Generally, custom designed filtering systems are used to determine the events and time series data of interest.

Thus, there is a need for a flexible and efficient method and system for processing data that is relevant to a process.

20

SUMMARY OF THE INVENTION

The method of the present invention frames activity data of a process with one or more activities. An activity is something that happened, happens
5 or is planned to happen over a period of time. The period of time or interval of one activity frames, entirely or in part, another activity associated with the happening. An activity may have one or more sub-activities, which may have one or more sub-sub-activities and so on, thereby resulting in a multi-tier hierarchy.

10

In a first embodiment of the method of the invention, the activity data is collected for a plurality of activities that each have an interval, which occurs during said process. The activity data is processed according to a data structure that defines the intervals of at least two of the activities such that
15 the interval of one frames the interval of the other. The processed activity data is stored in a memory.

A second embodiment of the method of the invention retrieves activity data of a process that is stored in a memory. First and second activities are
20 identified. The first activity has a first interval that frames a second interval of the second process at least in part. The first and second activities are processed to access the memory to retrieve the activity data.

According to one aspect of the first and second embodiments of the
25 method, the data structure includes an activity structure that comprises an identity and a plurality of attributes of the activities. The attributes of the activity structure include a start time and end time of the activity and an equipment or item used by the process during the activity. According to another aspect of the first and second embodiments of the method, one of
30 the attributes of the structure of one of the activities matches one of the attributes of the other activity.

According to another aspect of the second embodiment of the method, the second activity is identified with a reference that is either time based, direct or indirect with respect to the first activity. The time based reference is with respect to a parameter that is independent of the process. The direct
5 reference contains a reference by identity to the first activity. The indirect reference contains a reference to an equipment or item that is used by the process during the first activity.

A first and second embodiment of an apparatus of the present
10 invention comprises a computer that performs the method of the first and second method embodiments of the invention.

According to a third embodiment of the method of the present invention, a data structure is created with a first predetermined activity that is
15 a source of the activity data and that has a first interval and with a second predetermined activity that has a second interval. The second interval frames the activity data at least in part. The activity data is processed according to the data structure for storage in a memory. The first and second activities are processed to access the memory and store or retrieve the
20 activity data.

A third embodiment of an apparatus of the present invention comprises a computer that performs the method of the fourth method embodiment of the invention.
25

BRIEF DESCRIPTION OF THE DRAWINGS

Other and further objects, advantages and features of the present invention will be understood by reference to the following specification in conjunction with the accompanying drawings, in which like reference characters denote like elements of structure and:

Fig. 1 is a block diagram of a system of the present invention for processing time series data;

Fig. 2 is a block diagram of the computer of the Fig. 1 system;

Fig. 3 depicts an exemplary process, its events, time series data and activities;

Fig. 4 depicts an activity diagram for the Fig. 3 process;

Fig. 5 depicts a data and event diagram for the Fig. 3 process;

Figs. 6-8 depict data structures for activity framed time series data;

Figs. 9-11 depict data structures for activity framed event data;

Fig. 12-14 depict data structures for activity framed activity data; and

Figs. 15-19 are flow diagrams of the activity framing program of the computer of Fig. 2.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Fig. 1, a system 20 of the present invention includes a computer 22, a monitor 24 and a database 24. A network 30 interconnects

computer 22 and database 26 as well as a client device 32. Monitor 26 monitors a process 28 and provides process data to computer 22. Computer 22 processes the data and stores the data in a memory, such as database 26. Computer 22 may communicate with database 26 via network 30 or
5 directly, as shown by the dashed line 34.

Database 26 may be a part of the memory of computer 22 or a separate database, as shown in Fig. 1. Computer 22 may be a single computer or a plurality of computers interconnected via network 30. Network
10 30 may be any suitable wired or wireless communication network and may include the Internet an Intranet, the public telephone system and the like.

Client device 32 may be any suitable computer entry device with a capability to communicate with computer 22 via network 30. For example, if
15 network 30 is the Internet, client device 32 has a browser capability for Internet communications. As such, client device 32 may be a personal computer (PC), a workstation, a phone or other suitable device. Similarly, computer 22 would be equipped with Internet capability to serve files and/or otherwise communicate via the Internet.

20 Referring to Fig. 2, computer 22 includes a processor 34, a communications unit 36, a memory 38 and a bus 40. Bus 40 interconnects processor 34, communications unit 36 and memory 38. Memory 38 includes an operating system 42 and an activity framing program 44. Operating
25 system 42 controls processor 34 to execute activity framing program 44 to process data of process 28 monitored by monitor 24. A memory media 46 (e.g., a disk) contains a copy of operating system 42, activity framing program 44 or other software, which can be loaded into memory 38. Communications unit 36 includes the capability to communicate via network
30 30.

Activity framing program 44, when run, permits a client to operate client device 32 to identify process 28 in terms of events, time variable parameters and activities. An event is something that happens at a specific time, for example, the triggering of an alarm. Time series data is continuous data of a time variable parameter, such as temperature, pressure, flow rate and the like. An activity is a time interval of the process, for example, the operation of a pump during the process.

Activity framing program 44, when run, allows the monitored time series data, event data and activity data to be framed by defined activities for later retrieval and access based on the defined activity, attributes thereof and tag (identity) of the device that develops the time variable data, e.g., a temperature sensor.

For the purpose of describing the apparatus and method of the invention, an exemplary process that unloads a material, such as oil, from a ship will be initially described. It is understood, of course, that the system and method of the invention can be used with any process that has events, time variable parameters and/or activities that can be framed by a defined activity.

Referring to Fig. 3, a system 50 is shown for running process 28 for pumping out material from a ship 52 into a pair of holding tanks, Tank 1 and Tank 2. Ship 52 has a level indicator LI001 that monitors the material level in ship 52 during pump out process 28. A temperature monitor T101 monitors the outside ambient temperature as it can affect pumping performance. Material is pumped from ship 52 through pipes 54 and passes by a density analyzer A1001. The material is pumped to Tank 1 and Tank 2 by a pair of pumps, P101 and P102. When a valve V101 is open, the material is pumped by pump P101. When a valve V102 is open, the material is pumped by pump P102. A valve V103 controls the flow of material to Tank 1 and a valve V104 controls the flow of material to Tank 2. Flow rate to Tank 1 is monitored and

controlled a flow analyzer FI1001. Flow rate to Tank 2 is monitored and controlled by a flow analyzer FI1002. A level indicator LI101 monitors the level of material in Tank 1 and a level indicator LI102 monitors the level of material in Tank 2. A motor M101 controls an agitator 54 in Tank 1 and a
5 motor M102 controls an agitator 56 in Tank 2.

In system 50, the following constraints apply:

- a. Contents of ship 52 do not fit into a single tank.
- 10 b. Only one tank can be filled at a time.
- c. Only one pump can be used at a time.

Referring to Fig. 4, a number of activities are defined for the pump out process of ship 52. The execution of the activities begins at a time T0 and
15 completes at a time Tn. These activities are as follows:

- 1) Analyze activity – This activity continuously monitors analyzer A1001 throughout the pump out process from time T) to time Tn and alerts an operator if the material density is outside of a specified range.
20
- 2) Unload Ship activity – This activity is a procedure for initiating and monitoring the pump out of ship 52. It is the master procedure responsible for initiating sub activities: Pumpout1, Pumpout2, Pumpout3, Mix1, and Mix2.
25
- 3) Pumpout1, Pumpout2, Pumpout3 activities – These three pump out activities are of the same type, but each uses different settings. A pump out activity stops when a tank is full or a failure (e.g. pump failure) occurs. In such case, the higher-level activity Unload Ship is
30 responsible to schedule another pump out activity with the appropriate settings until ship 52 is empty. Activity Pumpout1 moves material from ship 52 to Tank 1. Activity Pumpout1 stops when Tank 1 is full.

Activity Pumpout2 pumps material from ship 52 to Tank 2. Activity Pumpout2 stops when pump P101 fails. Activity Pumpout3 uses pump P102 and continues pumping material to Tank 2 until ship 52 is empty.

5

- 4) Mix 1 activity – This activity is a procedure responsible for activating agitator 54 for Tank 1. Agitator 54 starts during activity Pumpout1 and runs for a period of time after the completion of activity Pumpout1.

10

- 5) Mix 2 activity – This activity is a procedure responsible for activating agitator 56 for Tank 2. Agitator 56 starts during activity Pumpout2 and runs for a period of time after the completion of activity Pumpout2.

These activities can be expressed in a hierarchical order of activity, sub-activity and sub-sub-activity as shown in Table 1.

15

TABLE 1

Activity	Unload Ship
Sub-activity	Pumpout1
Sub-sub-activity	Mix1
Sub-activity	Pumpout2
Sub-sub-activity	Mix2
Sub-activity	Pumpout3
Sub-sub-activity	Mix2

Referring to Fig. 5, a curve 60 represents the material level in ship 52 (i.e., the values of level sensor LI001) during the activity Unload Ship. Curve 62 represents the material level in Tank 1 (i.e., the values of level sensor LI101) during the sub-activity Pumpout1. Curve 64 represents the material level in Tank 2 (i.e., the values of level sensor LI102) during sub-activity Pumpout2. A curve 66 represents the ambient temperature (i.e., the values of temperature sensor T101) during the activity Unload ship. A curve 68

25

represents the flow rate of material as monitored by flow rate sensor FI1001 during sub-activity Pumpout1. A curve 70 represents the flow rate of material as monitored by flow rate sensor FI1001 during sub-activity Pumpout2. A curve 72 represents the flow rate of material as monitored by flow rate sensor FI1002 during sub-activity Pumpout3. As can be seen, the outputs of level sensors LI001, LI101 and LI102 and of flow rate sensors FI1001 and FI1002 vary with time and are continuous or time series data.

Figs. 3-5 show the execution of the activities and sub-activities required to pump out ship 52 over a period of time. At time T0, an instance of activity Unload ship is created. The operator would give the instance a name, for example, UNLOAD_2001_06_01. The operator would then initiate the activities in either an automated or manual manner.

As the activities are initiated, the process data shows a plurality of events 74, 76 and 78 that occur during the pump out process. Event 74 represents a flow change initiated by the operator to increase the flow rate during sub-activity Pumpout1. This flow rate change is monitored by sensor FI1001. Event 76 represents a temperature alarm detected when the ambient air temperature drops below a safe pump operating range during sub-activity Pumpout2. Event 78 represents a failure of pump P101 during sub-activity Pumpout2. As a result of the failure of pump P101, the process switches to the second pump P102.

Process 28 is initially defined as a data structure that has identified activities, sub-activities, sub-sub-activities, attributes, resources (e.g., sensors). Throughout the processing of the activities, sub-activities and sub-sub-activities of process 28, data is collected pertaining thereto, including time series data and event data. The apparatus and method of the present invention uses the data structure of activities, sub-activities and sub-sub-activities to frame time series data, event data and activity data. The framed data can then be processed, stored and retrieved based on the identity of the

activity, sub-activity or sub-sub-activity, attributes thereof and/or the sensor that monitored the data. Time series data can be related to an activity based on time, direct reference or indirect reference. These relations will be described with reference to the unload ship process example.

5

The case of time series data related to an activity based on time will be described with reference to Fig. 6. Sub-activity Pumpout1 has two attributes, namely a start time and an end time. Each of these attributes has an attribute value. Thus, the start time value is August 17, 2000 at 10:00am and the end time value is August 17, 2000 at 10:30am. The ambient temperature is not directly or indirectly related to the sub-activity Pumpout1. It is a general reading for the whole site and any activity run, or any equipment being used. The time series temperature data is related to the time of sub-activity Pumpout1. Thus, to process, store or retrieve the time series temperature data monitored by temperature sensor T101, the identities of the sub-activity Pumpout1 and temperature sensor T101 are used.

The case of time series data related to an activity based on direct reference will be described with reference to Fig. 7. An activity can have an attribute that is tied to a sensor value (i.e. the value of this attribute is not a single value, but its value changes over time). In Fig. 7, Sub-activity Pumpout1 has an additional attribute, namely flow rate. The flow rate is tied to flow rate sensor FI1001. The sensor identity (FI1001) is referred to herein as a tag. By giving an attribute a name (flow rate) and a sensor thereof a tag (FI1001), the same attribute (flow rate) can be used for the flow rate variable for a lot of different flow rate sensors. The time series data of flow rate sensor FI101 is related to sub-activity Pumpout1 by direct reference to the identities of the sub-activity, the attribute and the tag of the sensor. Thus, to process, store and retrieve the time series data monitored by flow rate sensor FI1001, the identities of the sub-activity, the flow rate attribute and the tag of the sensor are used. The direct reference case is an option that is used most

often in a flexible system where devices are allocated at a granular level (e.g. at the pump level, as opposed to an equipment unit level, i.e. with all the devices built onto the equipment).

5 The case of time series data related to an activity based on indirect reference will be described with reference to Fig. 8. An activity can have an attribute that identifies equipment that is used by the activity. On this equipment, the user can define a plurality of equipment attributes for different parts of the equipment, with each part attribute being tied to a sensor by a
10 tag. In Fig. 8, the sub-activity Pumpout1 has an attribute (equipment) that has an attribute value for an equipment part, namely Tank1. Attribute value (Tank 1) refers to an equipment (Tank 1) that has an attribute (Level) with an associated tag (sensor LI101). Thus, an indirect reference through the equipment attribute and sub-activity can be used to access time series data
15 of a part of the equipment. This option is used most often when a complete equipment unit, with all the devices built onto it, is allocated for use by an activity, sub-activity and so on.

 Event data can also be related to an activity based on time, direct
20 reference or indirect reference. The case of event data related to an activity based on time will yield all events that happened during the activity.

 Referring to Figs. 5 and 9, a time based retrieval request for events that happened during the activity PumpOut 2 identifies temperature alarm 76.
25 The retrieval shows that temperature alarm 76 occurred at 10:20am on August 20, 2000 during sub-activity PumpOut 2.

 Referring to Fig. 10, a retrieval request for event 74 (Fig. 5) by direct reference to an activity or sub-activity identifies the sub-activity Pumpout1
30 and results in a retrieval of data for events that occurred during the sub-activity.

Referring to Figs. 5 and 11, event 78 (Fig. 5) and activity Pumpout2 can be indirectly related to each other because they use the same equipment (referenced by one of their event/activity attributes).

5 An activity can also frame one or more other activities. That is, an activity can overlap another activity in whole or in part. An activity can be accessed by a time based reference, a direct reference or an indirect reference.

10 Referring to Fig. 12, a retrieval request for those activities that are related to a first activity by a time based reference identifies the first activity by name (Pumpout3) and essentially requests data of any activity that occurs entirely or partly during the time of activity Pumpout3. The retrieval identifies the sub-sub-activity of Pump Repair.

15 Referring to Fig. 13, a retrieval request for an activity by direct reference identifies all activities that have a direct reference thereto. Thus, if the request identifies the activity Unload Ship, data for the activity Analyze is retrieved.

20 Referring to Fig. 14, a retrieval request for an activity by indirect reference identifies an equipment attribute and value of Tank 1 thereof. The retrieval reveals the sub-activity of Pumpout1 and the sub-sub-activity Mix1.

25 Referring to Fig. 15, activity program 44 permits a user to define a process in terms of the activity/event/time series data structure. For example, the definitional data can be developed and identified during an interactive session between computer 22 and client device 32 operated by the user. Step 100 identifies the activities, sub-activities, sub-sub-activities and so on of the process. Step 102 identifies activity type attributes, such as
30 start times and end times, time variable parameters (e.g., flow rate), equipment and tags. That is, step 102 defines the attributes of an activity

that frames an event, a time varying parameter or another activity. Step 104 accepts activity types defined by step 100 and the attributes defined by step 102 for entry.

5 Step 106 identifies event types, such as temperature alarm 76. Step 108 identifies event type attributes, such as a time stamp (Fig. 9). Step 110 accepts event types defined by step 106 and the attributes defined by step 108 for entry. Step 112 identifies tags for sensors the monitor time series data. Step 114 accepts the tags defined by step 112. Step 116 stores the
10 data accepted by steps 104, 110 and 114 in data base 26 in a manner that permits access by activity, event, attributes of either and/or tags. For example, database 26 may be physically or logically organized by activity, event, attributes of either and/or tags. If logically organized, a storage access translator would be used to translate the activity, event, attributes of
15 either and/or tag access data into physical storage volumes.

Referring to Fig. 16, activity program 44 also permits the collection of data during the running of the process, such as process 28. Step 120 identifies that the process has been initiated by the operator or automatically
20 by a control system. Step 122 executes activities, such as Pumpout1 (Figs. 4, 6-10 and 14). That is, step 122 processes the activity so as to frame the time series data, event data and activity data collected with an interval of the activity. Step 124 determines when the step 122 is finished. Step 130 closes the collection of activity data.

25 Step 126 creates an activity history record, such as attribute values (e.g., start time and end time). Step 128 collects event happenings, time stamps and the like for events, such as temperature alarm 76. Step 132 processes the event happenings and links them to activities of any tier. Step
30 134 collects time series data monitored by the various sensors of the process.

Step 136 stores the activity, event and time series data in database 26 for retrieval by activity, attribute thereof and/or tag. Step 138 retrieves the data activity, event, attribute and/or sensor tag for processing or analysis.

5 Referring to Fig. 17, time series data of process 28 is retrieved from database 26 by activity framing program 44, for example, via an interactive session with a user operating client device 32. Step 140 identifies an activity specified by the user. The activity is matched to the data structure thereof, which reveals the attribute that contains a start time and an end time.

10

Step 142 identifies a time varying parameter of process 28. If the time varying parameter, for example, the ambient temperature, is unrelated to the activities of the process, a tag identifies it. If the time varying parameter is directly related to the identified activity, it will be an attribute of the matched data structure and will have the associated tag for the device that monitors the time series data of the identified time varying parameter. Alternatively, if the time varying parameter is indirectly related to the activity, the data structure contains an equipment attribute. The equipment attribute identifies an equipment part, time varying parameter and tag for the device.

20

Step 144 processes the activity and time varying parameter into a form suitable for accessing the time series data of the time varying parameter. For example (with reference also to Fig. 7), if the user identifies the flow rate during the PumpOut 1 activity, step 144 presents the request in a form useable to access database 26. Step 146 then accesses database 26 to retrieve the time series data of the flow rate during the PumpOut 1 activity.

25

Referring to Fig. 18, event data of process 28 is retrieved from database 26 by activity framing program 44, for example, via an interactive session with a user operating client device 32. Step 160 identifies an activity, for example PumpOut 1 or PumpOut 2, specified by the user. The activity is

30

matched to the data structure thereof, which reveals the attribute that contains a start time, an end time and an equipment.

Step 162 identifies an event of process 28. If step 162 is identifying
5 an event that is not directly related to process 28 based on a time reference, all such events that happened during the interval of the activity will be identified. For example, if step 160 identifies the activity of PumpOut 2, step 162 will then identify temperature alarm 76 and Pump 1 Failure 78 as events that occur during the interval of PumpOut 2 (Figs 5 and 9).

10

If step 162 is selecting an event that has a direct reference to the activity, all events having an attribute that refers to the activity will be selected. For example, if step 160 identifies the activity as PumpOut 1 and step 162 requests events by direct reference, step 162 will then identify the
15 event of Pump Speed change 74 (Fig. 10).

If step 162 is selecting an event by indirect reference to the activity, all events that happened on a given equipment while it was being used by the activity will be selected. For example, if step 160 identifies the activity of
20 Pumpout 2 and step 162 requests events by indirect reference, the event of Pump 1 Failure 78 will be identified (Fig. 11).

Step 164 processes the activity and event into a form suitable for accessing the event data of the event. Step 166 accesses database 26 to
25 retrieve the event data of the event that occurred during the interval of the activity.

Referring to Fig. 19, activity data of process 28 is retrieved from database 26 by activity framing program 44, for example, via an interactive
30 session with a user operating client device 32. Step 170 identifies an activity, for example Unload Ship, PumpOut 1 or Pumpout 3 (Figs. 5 and 12-15), specified by the user. The activity is matched to the data structure thereof,

which reveals the attribute that contains a start time, an end time and an equipment.

Step 172 identifies a related activity of the activity identified by step
5 170 that is to be framed. If the related activity is related to the activity based
on a time reference, all related activities that happened entirely or partly
during the interval of the activity will be selected. For example, if step 170
identifies the activity of PumpOut 3 (Figs. 5 and 12) and step 172 requests
related activities by a time based reference, step 172 will identify the activity
10 of Pump Repair that happened partly during the interval of activity PumpOut
3 (Fig. 12).

If the activity to be framed is directly related to the activity identified by
step 170, all related activities that have a reference thereto will be selected.
15 For example, if step 170 selects the activity of Unload Ship, the related
activity of Activity Analyze will be selected (Fig. 13) as it has an attribute
value that refers to activity of Unload Ship.

If the activity to be framed is indirectly related to the activity identified
20 by step 170, all related activities that occur entirely or partly during the
activity interval and that reference the same equipment as the equipment
referenced by the activity will be selected. For example, if step 170 identifies
the activity PumpOut 1 that refers to Tank 1, related activity Mix 1 that also
refers to Tank 1 will be identified (Fig. 14).

25

Step 174 processes the activity and the related activity into a form
suitable for accessing the data of the related activity. Step 176 accesses
database 26 to retrieve the data of the related activity for the interval of the
activity.

30

The present invention having been thus described with particular
reference to the preferred forms thereof, it will be obvious that various

changes and modifications may be made therein without departing from the spirit and scope of the present invention as defined in the appended claims.

PCT CLAIMS –10

Use Fig. 16.

1. 1. A method for processing the data of a process, said method comprising:

(a) collecting (24, 126) activity data from a first activity having a first interval and a second activity that has a second interval, said first and second intervals occurring during said process;

(b) processing (126) said activity data according to a data structure that defines said first and second intervals such that said first interval frames said second interval at least in part; and

(c) storing (136) said processed activity data.

2. The method of claim 1, wherein said data structure comprises an identity and a plurality of activity attributes for each of said first and second activities, and wherein said activity attributes are selected from the group consisting of: start time, end time and item used in said process.

3. The method of claim 2, wherein said item is an equipment, and wherein said activity attributes have an attribute value selected from the group consisting of: date and/or time and device of said equipment used in said process.

4. A method for retrieving activity data of a process (28) that is stored in a memory (26, 38), said method comprising:

(a) identifying (170) a first activity that has a first interval, which occurs during said process;

(b) identifying (172) a second activity that has a second interval, which occurs during said process and is framed at least in part by said first interval; and

(c) processing (174) said first and second activities to access said memory to retrieve said activity data.

5. The method of claim 4, wherein steps (a) and (b) utilize a data structure that comprises an identity and a plurality of activity attributes for each of said first and second activities, and wherein said activity attributes are selected from the group consisting of: start time, end time and item used in said process.

6. The method of claim 5, wherein said item is an equipment, and wherein said activity attributes have an attribute value selected from the group consisting of: date and/or time and device of said equipment used in said process.

7. The method of claim 5, wherein at least one of said attribute values of said second activity matches at least one of said attribute values of said first activity.

8. The method of claim 4, wherein step (b) identifies said second activity with a reference selected from the group consisting of: time based reference with respect to said first interval, direct reference to said first activity and indirect reference to said first activity.

9. A method for processing activity data of a process (28), said method comprising:

(a) processing (170, 172) a first activity that has a first interval and a second activity that has a second interval, wherein said second interval frames said first interval at least in part; and

(b) processing (176) said first and second activities to access a memory (26, 38) to store and/or retrieve said activity data.

10. An apparatus (22) for processing activity data of a process (28), said apparatus comprising:

first processing means (44, 176) for processing a first activity that has a first interval and a second activity that has a second interval, wherein said second interval frames said first interval at least in part; and

second processing means (44, 136, 176) for processing said first and second activities to access a memory (26, 38) to store and/or retrieve said activity data.

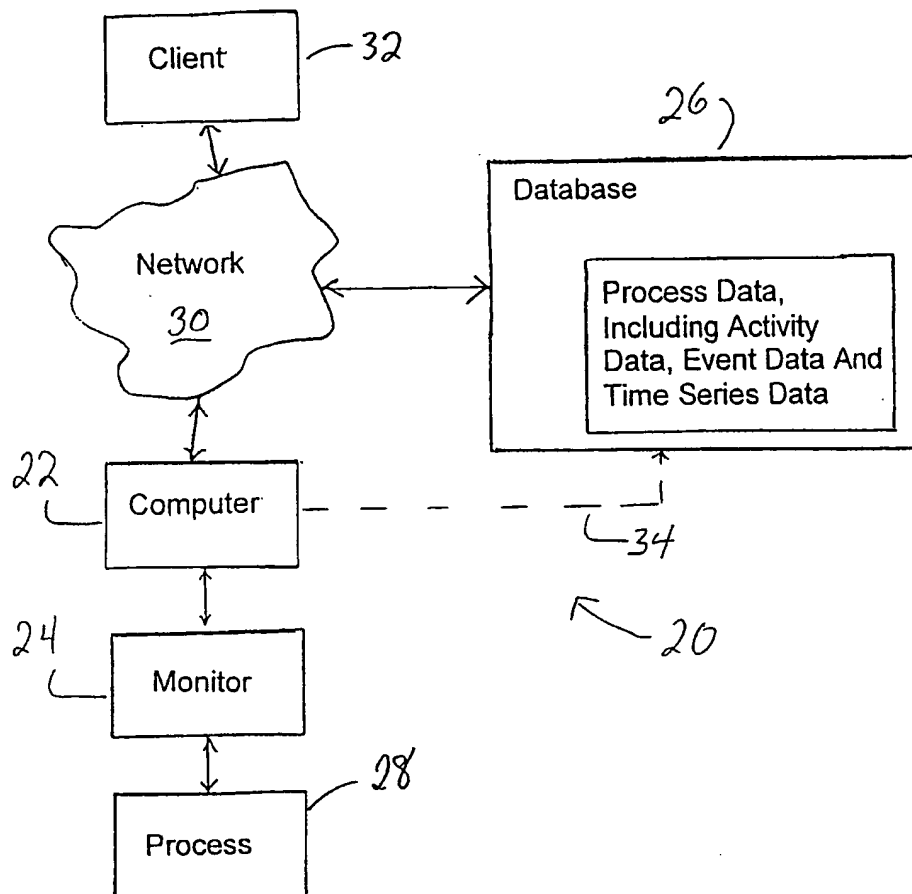


Fig. 1

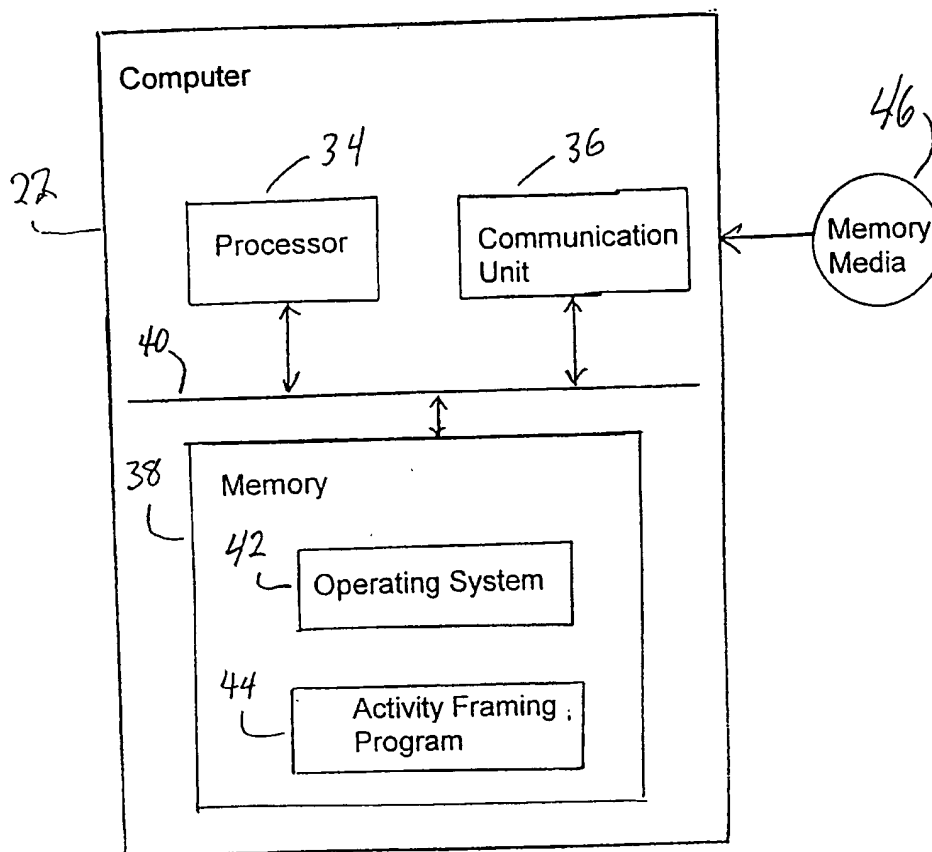


Fig. 2

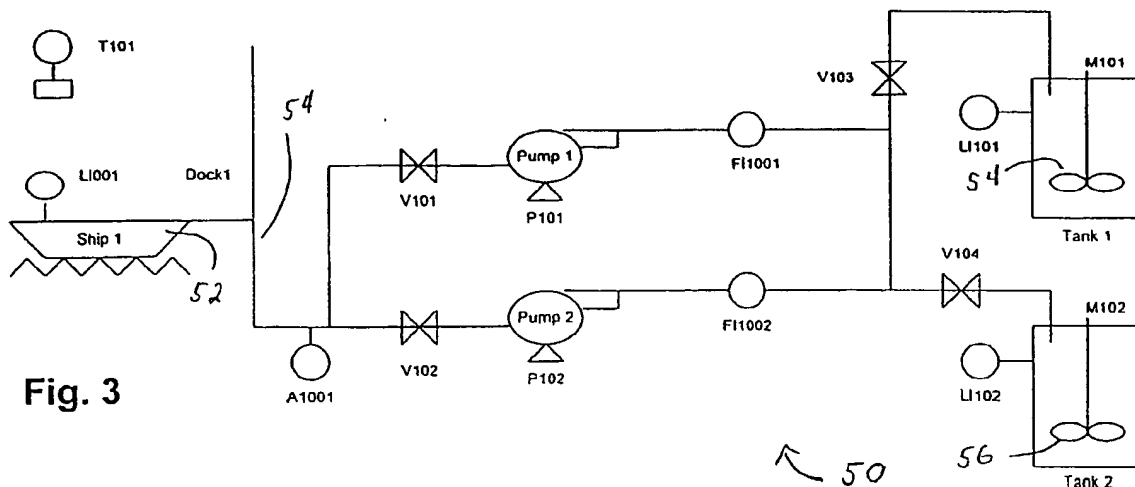


Fig. 3

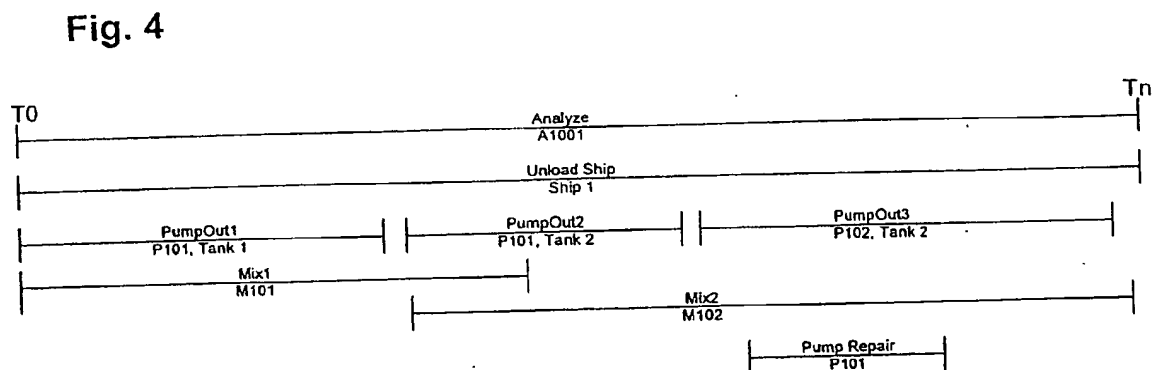


Fig. 4

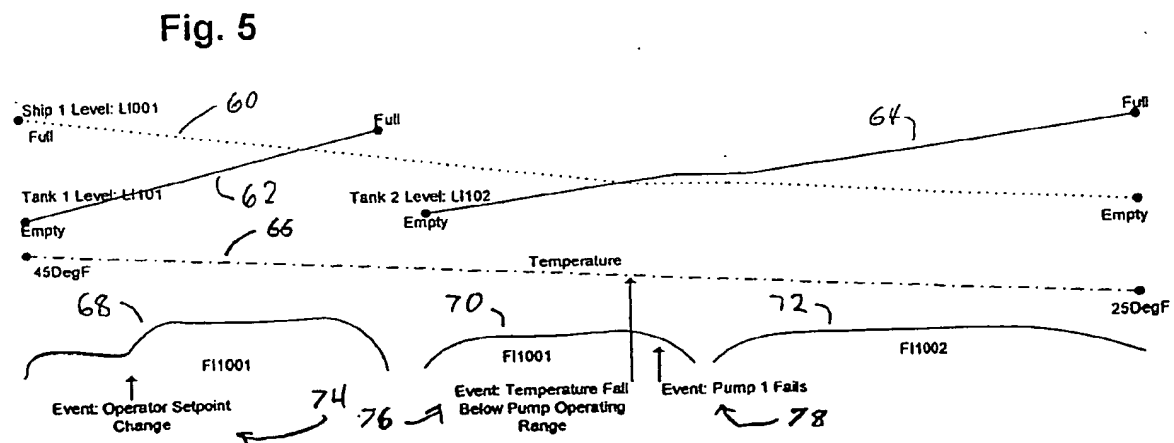


Fig. 5

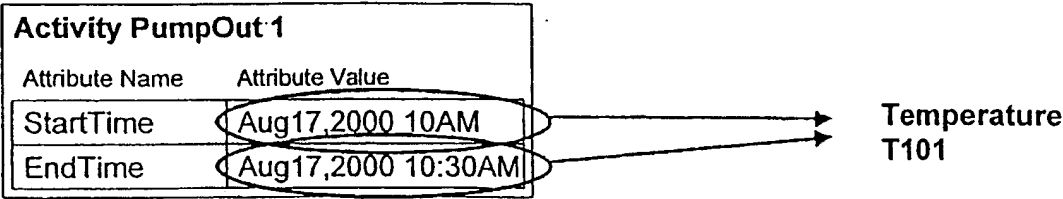


Fig. 6

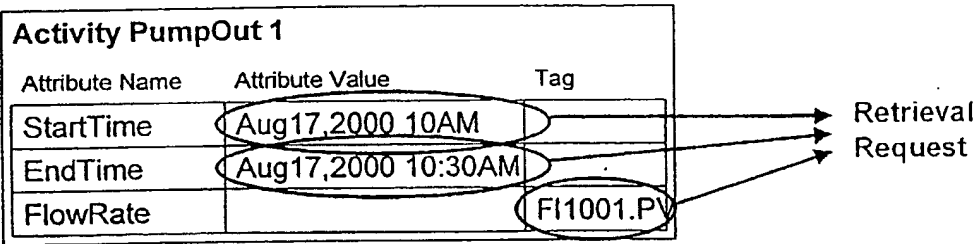


Fig. 7

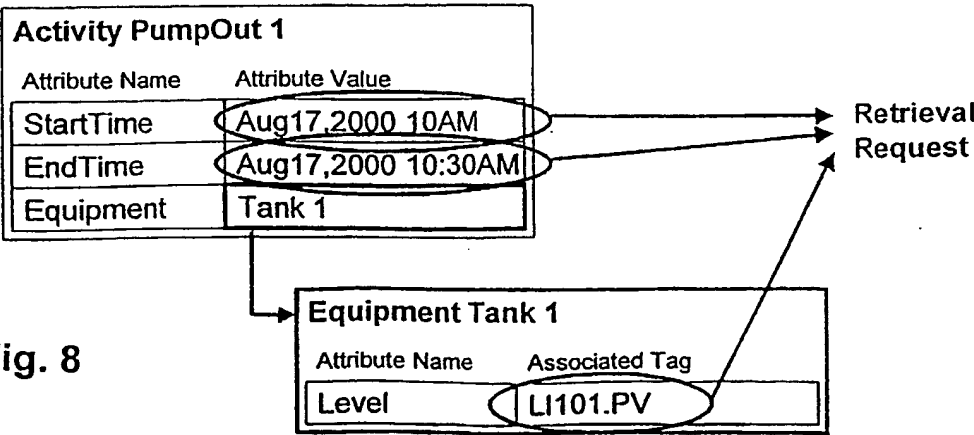


Fig. 8

Fig. 9

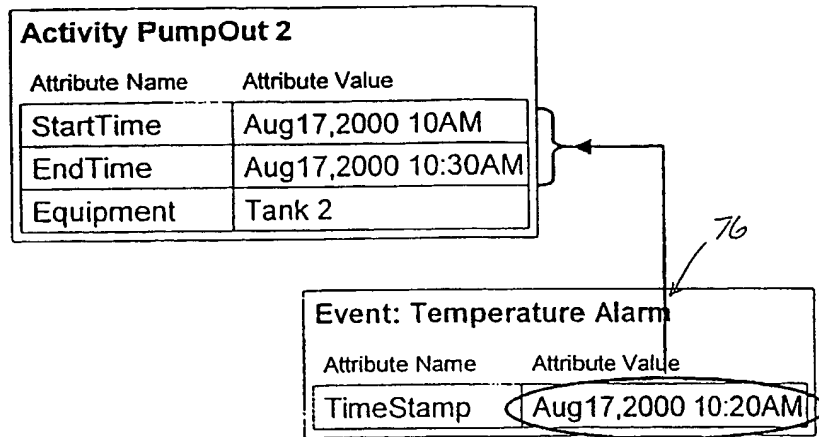


Fig. 10

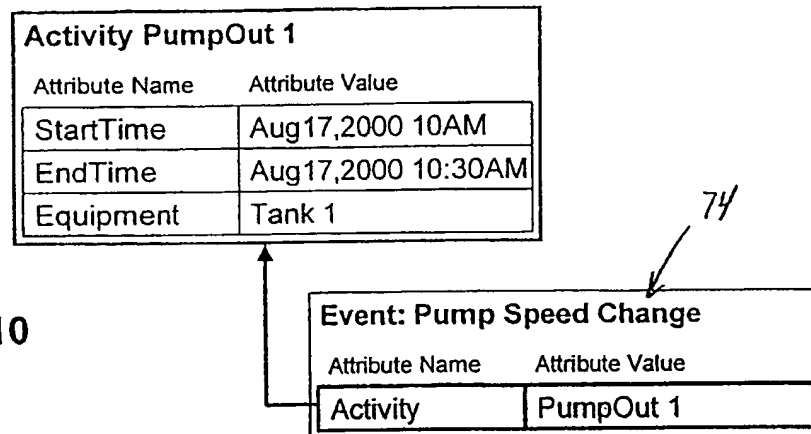
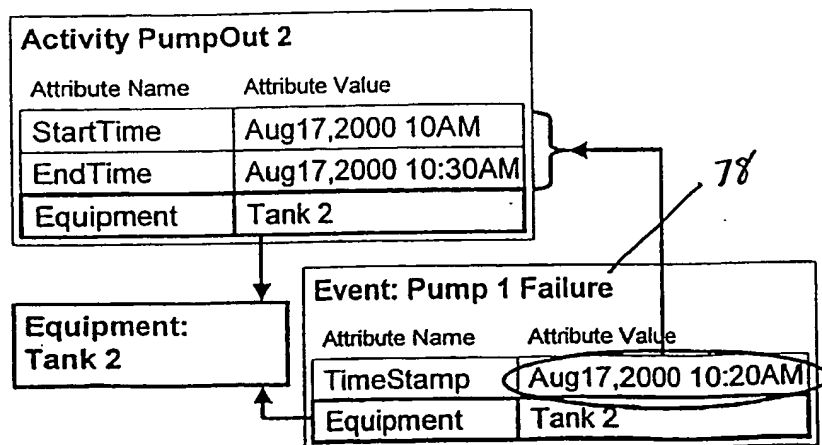
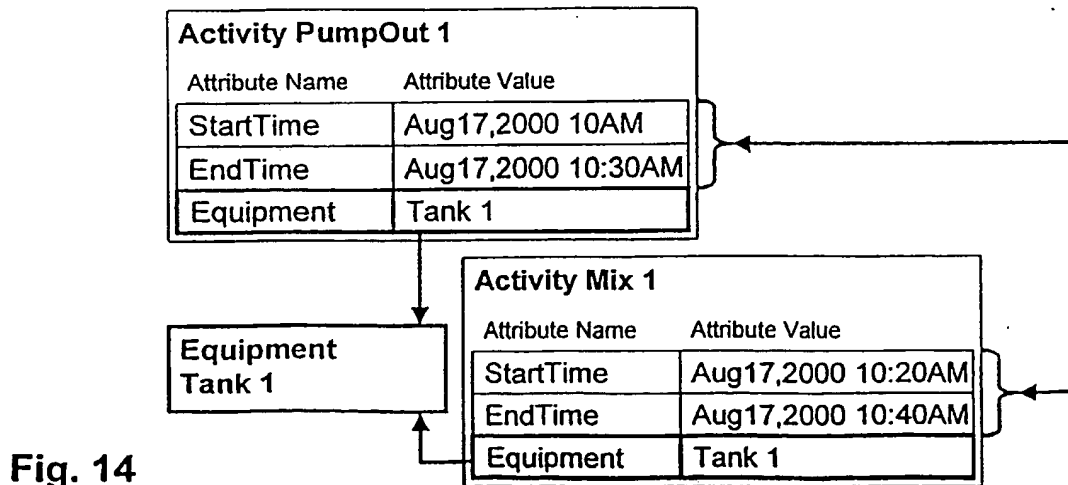
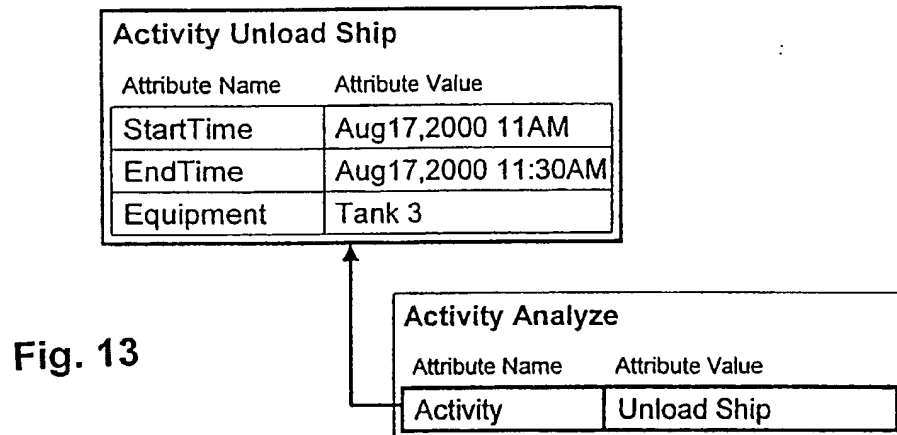
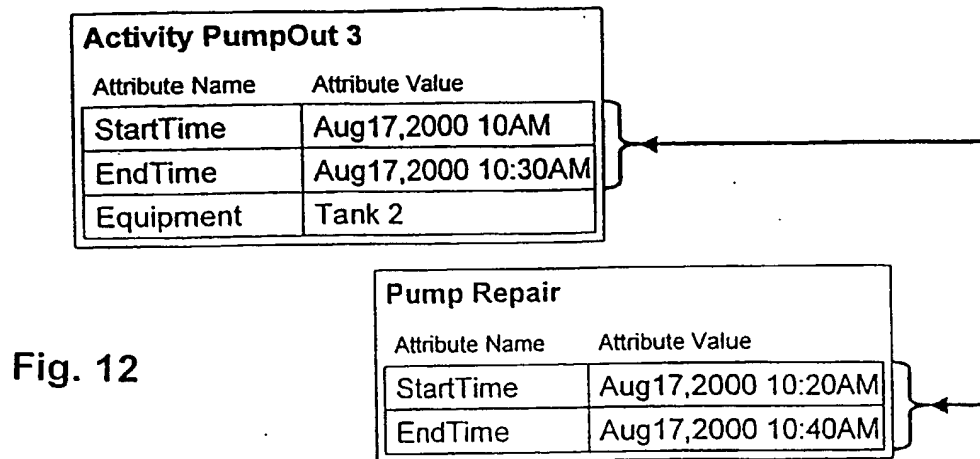


Fig. 11





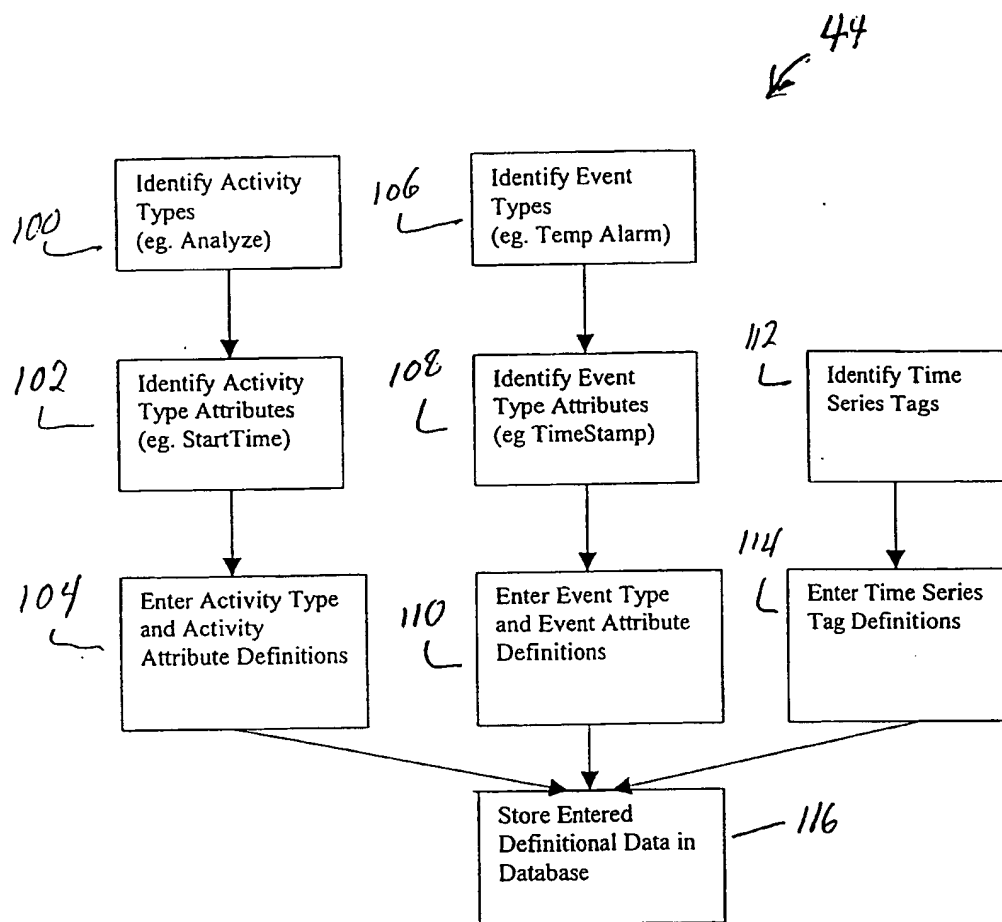


Fig. 15

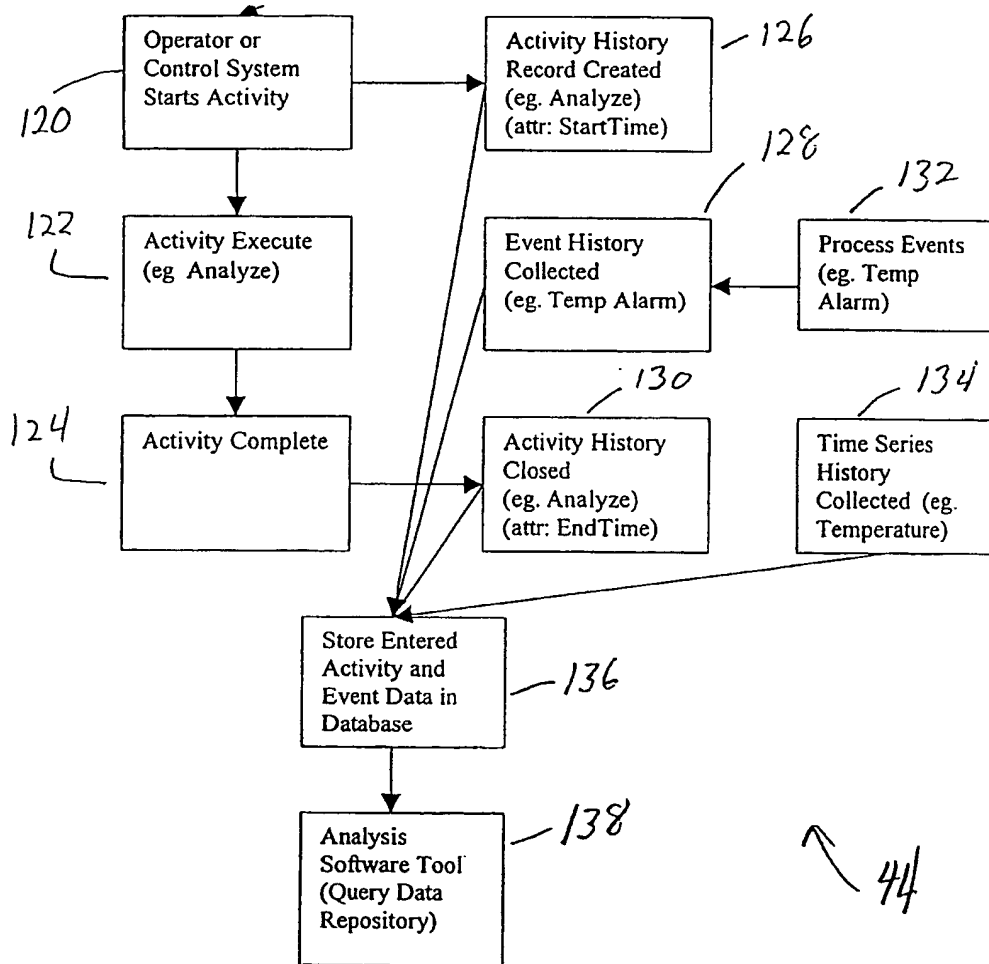


Fig. 16

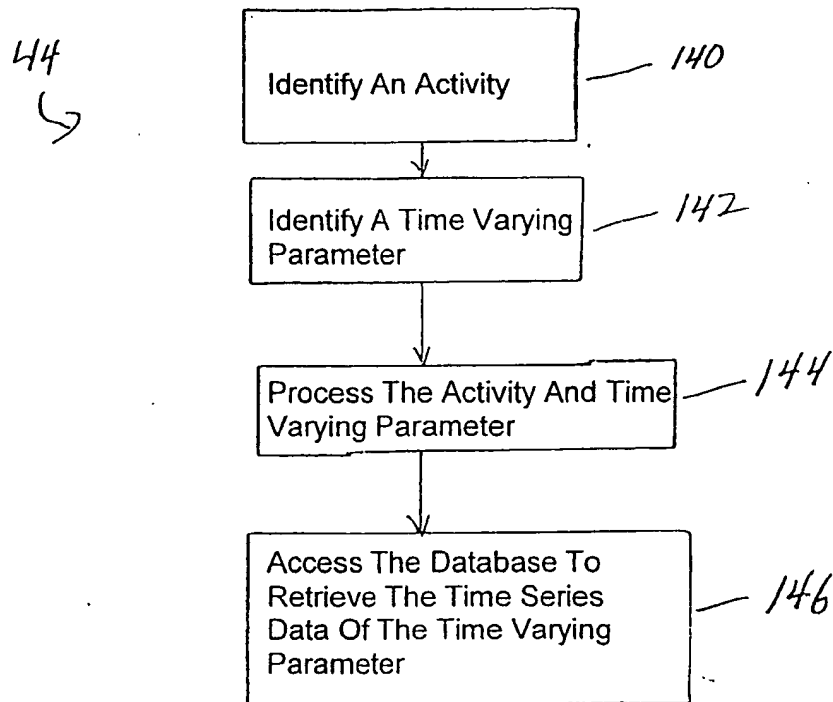


Fig. 17

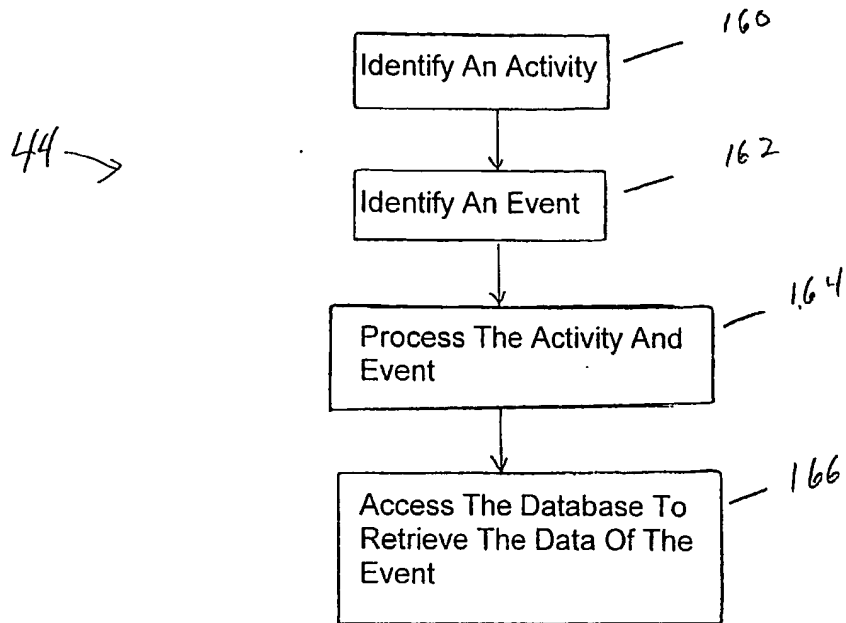


Fig. 18

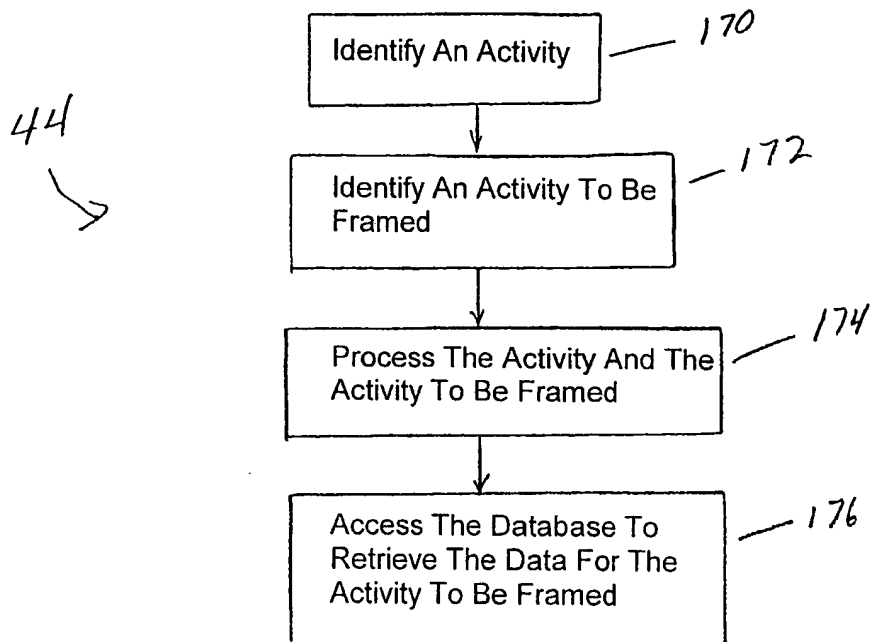


Fig. 19

INTERNATIONAL SEARCH REPORT

 Internati Application No
 PCT/LJ 02/41711

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 G05B23/02 G06F17/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G05B G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 325 522 A (VAUGHN MITCHELL D) 28 June 1994 (1994-06-28) column 12, line 24 -column 13, line 38; figures 1-9	1-10
X	EP 0 740 241 A (ADVANCED MICRO DEVICES INC) 30 October 1996 (1996-10-30) page 3, line 55 -page 5, line 28 page 9, line 30 - line 55; figures 1-18	1-10
X	WO 01 73666 A (ANDRIANOPOULOS ALEX ;DEMETRIADES ALEXANDER (US); SEEBEYOND TECHNOL) 4 October 2001 (2001-10-04) the whole document	1-10
A	EP 0 592 921 A (FISHER CONTROLS INT) 20 April 1994 (1994-04-20) the whole document	1-10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

4 April 2003

Date of mailing of the International search report

28/04/2003

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Gardella, S

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/41711

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5325522	A	28-06-1994	US 4908746 A	13-03-1990
EP 0740241	A	30-10-1996	US 5591299 A	07-01-1997
			AT 223078 T	15-09-2002
			DE 69623169 D1	02-10-2002
			EP 0740241 A2	30-10-1996
			JP 9115876 A	02-05-1997
WO 0173666	A	04-10-2001	AU 5105101 A	08-10-2001
			WO 0173666 A1	04-10-2001
			US 2002038228 A1	28-03-2002
EP 0592921	A	20-04-1994	US 5896138 A	20-04-1999
			DE 69316511 D1	26-02-1998
			DE 69316511 T2	01-10-1998
			EP 0592921 A1	20-04-1994

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.